



# L 320

## Mounting details


### Square version H80 - 596x596




1  
Panels in mineral fibre with exposed structure 600x600.




2  
Panels in mineral fibre with decoration in relief 600x600.



3  
Panels in mineral fibre with decoration 600x600, small voids.  
**Luminaires on request, installed flush with bracket accessory 15 ZH.**




4  
Plasterboard.  
**Luminaires on request, installed flush with bracket accessory 15 ZH.**




5  
Pull-up installation on grid false ceilings.  
**Luminaires on request, installed flush with bracket accessory 15 ZH.**


### Square version H55 - 596x596



6  
Panels in mineral fibre with exposed structure 600x600.




7  
Panels in mineral fibre with decoration in relief 600x600.




8  
Panels in mineral fibre with exposed structure 625x625.

### Square version H55 - 621x621

### Rectangular version H95 - 296x1196




9  
Mineral fibre panels 600x600, 600x1200 with exposed structure.



Note: rectangular luminaires have a width of 296mm. When installed on 600mm wide panels with exposed structure (600x600 or 600x1200), a further T profile must be used.


## Installation (square versions only)

### H55 and H80 version

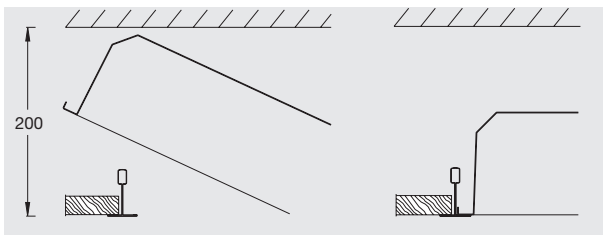


Installation following false ceiling mounting, supported by the exposed structure, minimum void of 200 mm from the structure's lower edge.

### H80 version

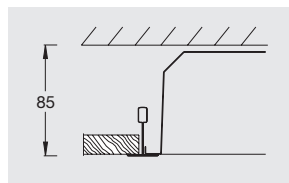


Installation simultaneously with the false ceiling, minimum void of 85 mm from the structure's lower edge.

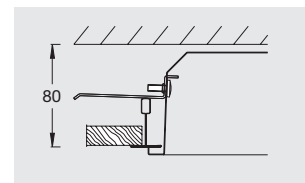

Minimum void of 80 mm from the structure's lower edge.  
**Luminaires on request, installed flush with bracket accessory 15 ZH.**

### H55 version

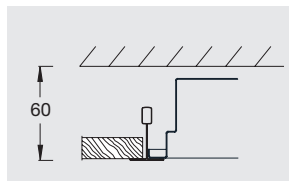

Installation simultaneously with the false ceiling, minimum void of 60 mm from the structure's lower edge.