




PRODUCT DETAILS



UPCOMING NEW FAST RUNNER UPDATED PHASE-OUT PRODUCTS

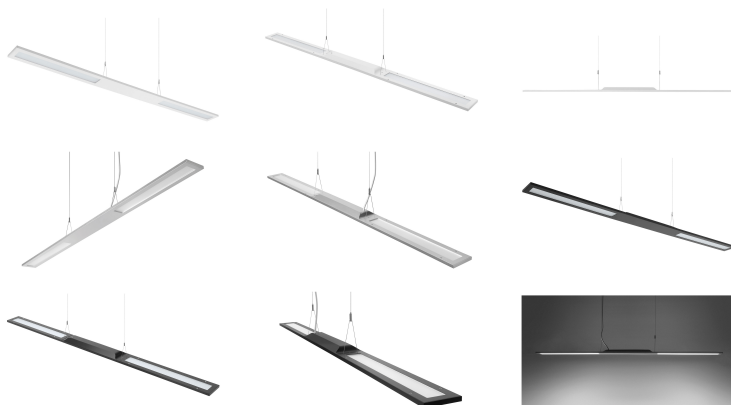

DOWNLOADS

[Datasheet](#)

[Installation manual](#)

DUELIS II

Description

MOUNTING	Suspended (SSD)
LIGHT SOURCE	LED
OPTICAL SYSTEM	Microprismatic diffuser (MCD)
LIGHT DISTRIBUTION	Direct-indirect
WIRING	Electronic control gear FIX / DALI (ECG / EDA) External lead-in flexible cable
MATERIALS	Diffuser: PMMA Housing: aluminium Rope suspension
SURFACE FINISH	Housing: white RAL 9003 (W03)
ACCESSORIES	Rope suspension
SERVICE LIFETIME (Ta=25°C)	50,000 hours / L80 / B10
AMBIENT OPERATING TEMPERATURE	From -20 °C to +35 °C

AREAS OF APPLICATION

EDUCATION

HEALTH AND CARE

OFFICE



Accessories



List of products

PRODUCT NAME	STATUS	QUICK DOWNLOADS
DUELIS II MICROPRISMA LED 5300lm/830 1x65W, FIX, RAL 9003		RFA / 3DS / IES / LDT / CURVE /
DUELIS II MICROPRISMA LED 5450lm/840 1x65W, FIX, RAL 9003		RFA / 3DS / IES / LDT / CURVE /
DUELIS II MICROPRISMA LED 5300lm/830 1x65W, DALI, RAL 9003		RFA / 3DS / IES / LDT / CURVE /
DUELIS II MICROPRISMA LED 5450lm/840 1x65W, DALI, RAL 9003		RFA / 3DS / IES / LDT / CURVE /

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.