BOXIT WALL

FEATURES

- Lithium battery (LiFePO$_4$)
- Low power consumption
- Single and double sided decal
- Compliant emergency exits signage
- Replaceable, easy fit, quick release decals
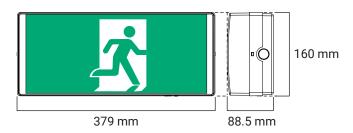- Maintained or non-maintained operation

ENVIRONMENT
Environmentally friendly Lithium ion phosphate battery

SINGLE POINT UNIT
Ektor products work as SPUs out of the box

ROD MOUNT
Suspend the Boxit using a rod mount

WALL MOUNT
Designed for easy mounting to walls

379 mm

88.5 mm

160 mm

PRODUCT RANGE

ORDER CODE	QTY
EV-BOXIT-WALL Basic Wall Mounted Emergency Exit	6

FEATURES

- Lithium battery (LiFePO$_4$)
- Low power consumption
- Single and double sided decal
- Compliant emergency exits signage
- Replaceable, easy fit, quick release decals
- Maintained or non-maintained operation

TOTAL POWER CONSUMPTION (TPC)

NON-MAINTAINED MODE	
MAX.	**AVG.**
3.60 W	3.33 W

ACCESSORY RANGE

ORDER CODE	DESCRIPTION
EV-BOXIT-DP	Boxit Decal pack wall & ceiling
EV-BOXIT-GT	Boxit LED Gear tray
EV-BOXIT-DIFF-WALL	Boxit Wall diffuser (decal pack included)
EV-RODMOUNT-WHT	Rod mount, incl. Bracket for roof /body
ZC-BATT-1500MAH-1	zencontrol 1500mAh 3.2V 1 Cell LiFePO$_4$ battery

OPERATIONAL INFORMATION

GENERAL

Voltage	~220-240V
Frequency	50Hz
Ambient temp.	0 - 40°C
Class	2
Wiring	Hardwired
Mounting type	Surface/suspended (Rod mount kit not included)
IP rating	IP20
Decal size	300 x 150 mm
Lamp power	0.95 W

EMERGENCY

Rated duration	3 hours

COMPLIANCE

Standards	IEC 60598-2-22 CISPR 15 EMC-2004/108/EC LVD-2006/95/EC

BATTERY / CHARGE

BATTERY		CHARGE	
Type	LiFePO$_4$	**Type**	Variable
Voltage	3.2 V	**Time**	16 Hours
Code	zc-batt-1500mah-1		

CONSTRUCTION

Body	PC
Diffuser	PC
Gear tray	PC

NOTE: For more information on the chemical resistance of our polycarbonate, please see our website.

Datasheet is subject to change without notice, E&OE
Last updated: 27 September 2018 _V1.0