




Data Sheet

LED Satellite Weatherproof DALI Emergency

CAT NO. 684875/D



Product specifications	
Cat. No.	684875/D
Description	Satellite LED 1x02W Weatherproof Surface Mount DALI
Operation mode	Non-maintained
Light source	1x2W LED
Battery	Ni-MH 1x5 C-cells linear – 6.0V d.c. 4Ah
Operating voltage	240V a.c. +/- 6% 50Hz
Power consumption	3.3W hrc/ 1.1W lrc
Body construction	Polypropylene box
Diffuser	Transparent polycarbonate
Operating temperature	10°C to + 40°C
Lighting classification	C ₀ /C ₉₀ D25/D25
IP rating	IP55
Compliance	IEC 62385 AS/NZS 2293 AS/NZS 60598   


*hrc- high rate charge, lrc- low rate charge

LED Satellite Weatherproof DALI Emergency

CAT NO. 684875/D



- Non-maintained operation
- DALI computer monitored
- Weatherproof IP55
- Robust design
- One high brightness LED
- Very long lamp life
- D25/D25 classification
- AS2293 compliant
- Manufactured in Australia

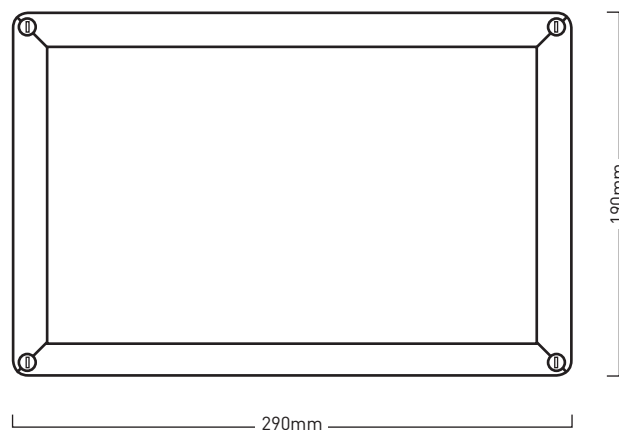

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.