

# PRODUCT FAMILY DATASHEET

## OUTDOOR FACADE INDIRECT

Luminaires with rotatable head and indirect light



---

### AREAS OF APPLICATION

- Outdoor
- Building facades
- Decorative illumination

---

### PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

---

### PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Available in two housing colors: white and dark gray
- Swivel angle: 90°
- Diffuser made of opal PMMA




TECHNICAL DATA


Product description	Electrical data	Photometrical data	Light technical data	Dimensions & weight			Colors & materials	Temperatures & operating conditions	Lifespan	
	Nominal wattage	Luminous flux	Beam angle	Diameter	Height	Product weight	Product color	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C
O FACADE IND RD 13 W 3000 K IP54 GY	13.00 W	480 lm	240 °	150.0 mm	118.0 mm	790.00 g	Gray	-20...40 °C	30000 h	- h
LED FACADE INDIRECT 13 W 3000 K RD WT	13.00 W	640 lm	240 °	150.0 mm	118.0 mm	790.00 g	White	-20...40 °C	30000 h	- h

Product description	Lifespan L90 at 25 °C	Additional product data		Capabilities	Certificates & standards		
		Mounting type	Mounting location	Dimmable	Type of protection	Protection class	Protection class IK (shock resistance)
O FACADE IND RD 13 W 3000 K IP54 GY	- h	Surface	Wall	No	IP54	I	IK06
LED FACADE INDIRECT 13 W 3000 K RD WT	- h	Surface	Wall	No	IP54	I	IK06

Product description	Glow Wire Test according to IEC 695-2-1	Photobio. safety group acc. to EN62471	Standards
O FACADE IND RD 13 W 3000 K IP54 GY	-	RG 0	CE
LED FACADE INDIRECT 13 W 3000 K RD WT	-	RG 0	CE

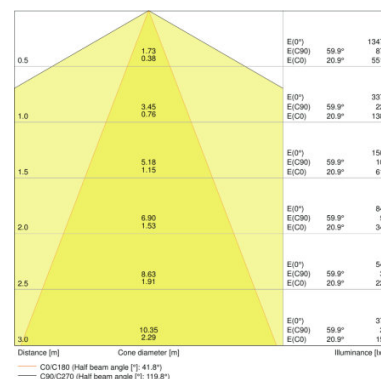

O FACADE IND RD 13 W 3000 K IP54 GY, LED FACADE INDIRECT 13 W 3000 K RD WT

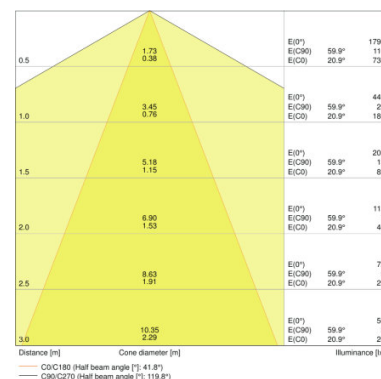

LED FACADE INDIRECT 13 W 3000 K RD WT

### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

### LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075075016	O FACADE IND RD 13 W 3000 K IP54 GY	Shipping carton box 6	300 mm x 275 mm x 185 mm	15.26 dm <sup>3</sup>	5308.00 g
4058075075030	LED FACADE INDIRECT 13 W 3000 K RD WT	Shipping carton box 6	300 mm x 275 mm x 185 mm	15.26 dm <sup>3</sup>	5308.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.