

# PRODUCT FAMILY DATASHEET

## OUTDOOR FACADE UPDOWN

Luminaires with classic shape and light outlet up and down



---

### AREAS OF APPLICATION

- Outdoor
- Building facades
- Decorative illumination

---

### PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

---

### PRODUCT FEATURES

- Very bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Available in two housing colors: white and dark gray
- Diffuser made of clear glass






TECHNICAL DATA

Product description	Electrical data	Photometrical data	Light technical data	Dimensions & weight				Colors & materials	Temperatures & operating conditions	Lifespan
	Nominal wattage	Luminous flux	Beam angle	Length	Width	Height	Product weight	Product color	Ambient temperature range	Lifespan L70 at 25 °C
O FACADE UPDOWN 12 W 3000 K IP54 GY	12.00 W	700 lm	280.00 °	55.0 mm	90.0 mm	160.0 mm	480.00 g	Gray	-20...40 °C	30000 h
O FACADE UPDOWN 12 W 3000 K IP54 WT	12.00 W	710 lm	280.00 °	55.0 mm	90.0 mm	160.0 mm	480.00 g	White	-20...40 °C	30000 h

Product description	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C	Additional product data		Capabilities	Certificates & standards	
			Mounting type	Mounting location	Dimmable	Type of protection	Protection class
O FACADE UPDOWN 12 W 3000 K IP54 GY	- h	- h	Surface	Wall	No	IP54	I
O FACADE UPDOWN 12 W 3000 K IP54 WT	- h	- h	Surface	Wall	No	IP54	I

Product description	Protection class IK (shock resistance)	Glow Wire Test according to IEC 695-2-1	Photobio. safety group acc. to EN62471	Standards
O FACADE UPDOWN 12 W 3000 K IP54 GY	IK06	-	RG 0	CE
O FACADE UPDOWN 12 W 3000 K IP54 WT	IK06	-	RG 0	CE

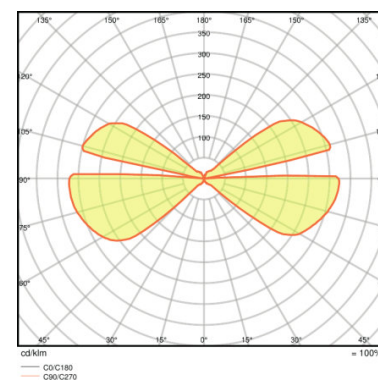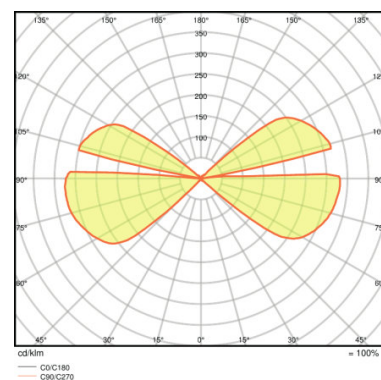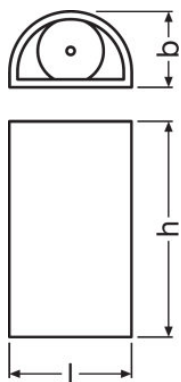

O FACADE UPDOWN 12 W 3000 K IP54 GY, O FACADE UPDOWN 12 W 3000 K IP54 WT

O FACADE UPDOWN 12 W 3000 K IP54 GY

O FACADE UPDOWN 12 W 3000 K IP54 WT

### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

### LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075075054	O FACADE UPDOWN 12 W 3000 K IP54 GY	Shipping carton box 6	245 mm x 240 mm x 195 mm	11.47 dm <sup>3</sup>	3193.00 g
4058075075078	O FACADE UPDOWN 12 W 3000 K IP54 WT	Shipping carton box 6	245 mm x 240 mm x 195 mm	11.47 dm <sup>3</sup>	3193.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.