

PRODUCT FAMILY DATASHEET

OUTDOOR BOLLARD POLE

Stainless steel bollards with indirect illumination



AREAS OF APPLICATION

- Outdoor
- Pathway lighting
- Driveways

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Special light guide design for low-glare illumination

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP44
- Housing made of Polycarbonate covered with stainless steel
- Available as wall, ceiling and bollard luminaires
- Diffuser made of transparent polycarbonate







TECHNICAL DATA

Product description	Electrical data	Photometric data	Light technical data	Dimensions & weight			Colors & materials	Temperatures & operating conditions	Lifespan	
	Nominal wattage	Luminous flux	Beam angle	Diameter	Height	Product weight	Product color	Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C
O BOLLARD 500 POLE 6 W 3000 K IP44 SST	6.00 W	360 lm	160 °	102.0 mm	500.0 mm	900.00 g	Steel	-20...40 °C	30000 h	- h
O BOLLARD 800 POLE 6 W 3000 K IP44 SST	6.00 W	360 lm	160 °	102.0 mm	800.0 mm	1500.00 g	Steel	-20...40 °C	30000 h	- h

Product description	Lifespan L90 at 25 °C	Additional product data		Capabilities	Certificates & standards		
		Mounting type	Mounting location	Dimmable	Type of protection	Protection class	Protection class IK (shock resistance)
O BOLLARD 500 POLE 6 W 3000 K IP44 SST	- h	Surface	Ground	No	IP44	II	IK06
O BOLLARD 800 POLE 6 W 3000 K IP44 SST	- h	Surface	Ground	No	IP44	II	IK06

Product description	Glow Wire Test according to IEC 695-2-1	Photobio. safety group acc. to EN62471	Standards
O BOLLARD 500 POLE 6 W 3000 K IP44 SST	-	RG 0	CE
O BOLLARD 800 POLE 6 W 3000 K IP44 SST	-	RG 0	CE

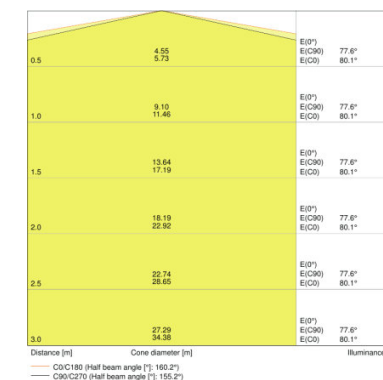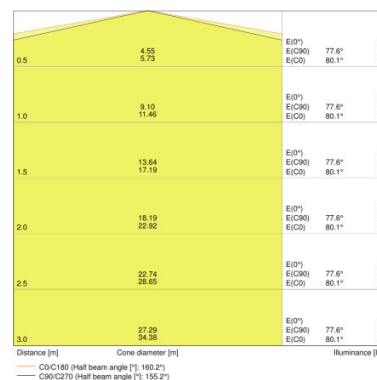

O BOLLARD 500 POLE 6 W 3000 K IP44 SST

O BOLLARD 800 POLE 6 W 3000 K IP44 SST

O BOLLARD 500 POLE 6 W 3000 K IP44 SST

O BOLLARD 800 POLE 6 W 3000 K IP44 SST

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075075139	O BOLLARD 500 POLE 6 W 3000 K IP44 SST	Shipping carton box 2	535 mm x 175 mm x 320 mm	29.96 dm ³	2483.00 g
4058075075153	O BOLLARD 800 POLE 6 W 3000 K IP44 SST	Shipping carton box 2	835 mm x 175 mm x 320 mm	46.76 dm ³	3921.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.