

PRODUCT FAMILY DATASHEET

SPOT VARIO

Recessed mounted spotlight, swivelable



AREAS OF APPLICATION

- Accent- and general lighting for all kind of salesrooms
- Retail
- Supermarkets
- Shops, boutiques
- Hotel rooms
- Stairways
- Corridors
- Lobbies

PRODUCT BENEFITS

- Low flicker light thanks to special electronic control gear
- High luminous efficacy
- Die-cast aluminum housing for improved heat dissipation
- Easy replacement of external driver thanks plug with bayonet lock
- Design matches the LEDVANCE Spot-, Down- and Tracklight luminaire family
- Shallow mounting depth
- Various options to highlight target areas
- 5 years guarantee

PRODUCT FEATURES

- Large faceted reflector for high light output
- Beam angle: 24°
- Rotation angle: 0°...350°, tilt angle: 0°...35°
- Diameter of required ceiling cut out: 165...170 mm





TECHNICAL DATA

Product description	Electrical data			Luminaire control gear data				
	Nominal wattage	Nominal voltage	Mains frequency	ECG - Length	ECG - Width	Max. no. of lum. on circuit break. B16 A	Max. no. of lum. on circuit break. C10 A	Max. no. of lum. on circuit break. C16 A
SPOT VARIO DN 170 35 W 3000 K 24DEG WT	35.00 W	220...240 V	50/60 Hz	153 mm	44 mm	15	9	15
SPOT VARIO DN 170 35 W 4000 K 24DEG WT	35.00 W	220...240 V	50/60 Hz	153 mm	44 mm	15	9	15

Product description	Photometrical data			Light technical data	Dimensions & weight				Colors & materials
	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Diameter	Height	Product weight	Mounting diameter	Body material
SPOT VARIO DN 170 35 W 3000 K 24DEG WT	3350 lm	Warm White	>80	24 °	180.0 mm	129.0 mm	1126.00 g	170 mm	Aluminum
SPOT VARIO DN 170 35 W 4000 K 24DEG WT	3550 lm	Cool White	>80	24 °	180.0 mm	129.0 mm	1126.00 g	170 mm	Aluminum


Product description	Product color	Cover material	Temperatures & operating conditions	Lifespan			Capabilities
			Ambient temperature range	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C	Adjustable
SPOT VARIO DN 170 35 W 3000 K 24DEG WT	White	Polymethylmethacrylate (PMMA)	-20...45 °C	50000 h	45000 h	30000 h	Yes
SPOT VARIO DN 170 35 W 4000 K 24DEG WT	White	Polymethylmethacrylate (PMMA)	-20...45 °C	50000 h	45000 h	30000 h	Yes

Product description	Dimmable	Type of connection	Certificates & standards	
			Protection class	Type of protection
SPOT VARIO DN 170 35 W 3000 K 24DEG WT	No	Screw terminal, 2-Pole (L,N)	II	IP20
SPOT VARIO DN 170 35 W 4000 K 24DEG WT	No	Screw terminal, 2-Pole (L,N)	II	IP20

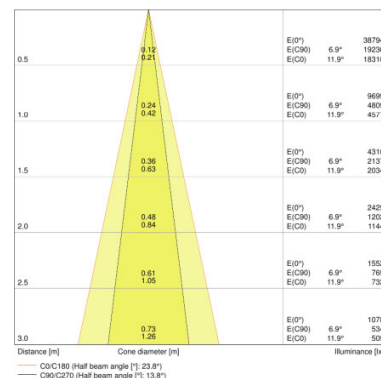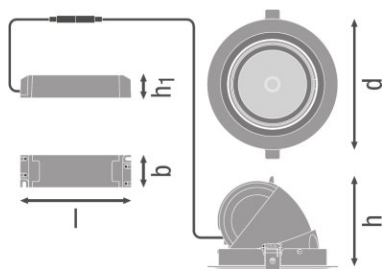

SPOT VARIO DN 170 35 W 3000 K 24DEG WT, SPOT VARIO DN 170 35 W 4000 K 24DEG WT

SPOT VARIO DN 170 35 W 3000 K 24DEG WT

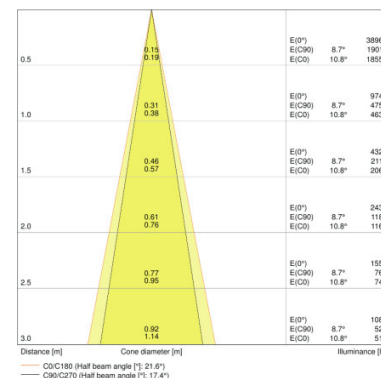

SPOT VARIO DN 170 35 W 4000 K 24DEG WT

EQUIPMENT / ACCESSORIES

- Driver included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075104020	SPOT VARIO DN 170 35 W 3000 K 24DEG WT	Shipping carton box 4	415 mm x 215 mm x 320 mm	28.55 dm ³	5727.00 g
4058075104044	SPOT VARIO DN 170 35 W 4000 K 24DEG WT	Shipping carton box 4	415 mm x 215 mm x 320 mm	28.55 dm ³	5727.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.