




PRODUCT DETAILS



UPCOMING NEW FAST RUNNER UPDATED PHASE-OUT PRODUCTS

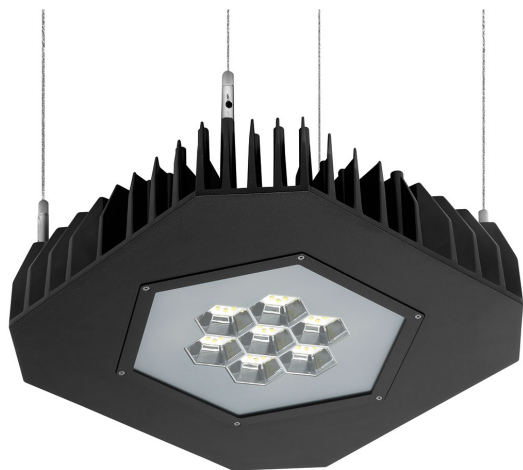

DOWNLOADS

[Datasheet](#)

[Installation manual](#)

GRAFIAS SUSPENDED

Description Product map

MOUNTING	Suspended (SSD)
LIGHT SOURCE	LED
OPTICAL SYSTEM	Polished reflector (PRE)
LIGHT DISTRIBUTION	Direct
WIRING	Electronic control gear FIX / DALI (ECG / EDA) Emergency unit variant (3H)
MATERIALS	Cover: transparent hardened glass Housing: die-cast aluminium Reflector: evaporative coated PC Housing: black RAL 9005 (B05)
SURFACE FINISH	Rope suspension
ACCESSORIES	Chain suspension system: X1 - for 1 luminaire X2 - for 2 luminaires X4 - for 4 luminaires Additional reflector with 50° beam angle
SERVICE LIFETIME (Ta=25°C)	50,000 hours / L80 / B10 (94 W) 50,000 hours / L70 / B50 (142 W)
AMBIENT OPERATING TEMPERATURE	From -40 °C to +40 °C (from 5 °C with EM unit)

AREAS OF APPLICATION SPORT AND LEISURE


INDUSTRY AND ENGINEERING

RETAIL AND PRESENTATION



Accessories

— 901 005



List of products

PRODUCT NAME	STATUS	QUICK DOWNLOADS
GRAFIAS SUSPENDED 80° LED 10400lm/840 1x94W, FIX, -		RFA / 3DS / IES / LDT / CURVE /
GRAFIAS SUSPENDED 80° LED 11900lm/750 1x94W, FIX, -		RFA / 3DS / IES / LDT / CURVE /
GRAFIAS SUSPENDED 80° LED 16000lm/840 1x142W, FIX, -		RFA / 3DS / IES / LDT / CURVE /
GRAFIAS SUSPENDED 80° LED 17200lm/750 1x142W, FIX, -		RFA / 3DS / IES / LDT / CURVE /
GRAFIAS SUSPENDED 80° LED 10400lm/840 1x94W, DALI, -		RFA / 3DS / IES / LDT / CURVE /
GRAFIAS SUSPENDED 80° LED 11900lm/750 1x94W, DALI, -		RFA / 3DS / IES / LDT / CURVE /
GRAFIAS SUSPENDED 80° LED 16000lm/840 1x142W, DALI, -		RFA / 3DS / IES / LDT / CURVE /
GRAFIAS SUSPENDED 80° LED 17200lm/750 1x142W, DALI, -		RFA / 3DS / IES / LDT / CURVE /

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.