

8 986 259 019

Nightspot B RGBW pole luminaire, narrow beam




With 7 × 1,5 W RGBW high performance LED module, RGBW (4000 K)

protection class I, IP67, ENEC, IK08

Leuchtgehäuse aus hochkorrosionsbeständigem Aluminium-Druckguss AlSi12 (Leg. 230), Polyesterpulver beschichtet in hochwertig deckendem, UV-stabilen Schichtverfahren, all exterior steel parts are stainless steel, Edelstahl, temperaturwechselbeständiges ESG Sicherheitsglas, einseitig entspiegelt, silicon gasket, for installation on poles Ø 60-100mm, adjustable aluminium mounting base, powder coated: 2 drilled holes Ø 9mm, spacing 105mm, 1 centre hole Ø 22mm, tilt range 80°, swivel range 180°, cable gland: M20, integral driver (AC/DC),

Service life L: 70, B:20 > 50.000 h

Part number	Colour	Light source	Weight	Beam angle (FWHM)
8 986 259 019	silver grey	7 × 1,5 W RGBW high performance LED module, RGBW (4000 K)	5,80 kg	19°

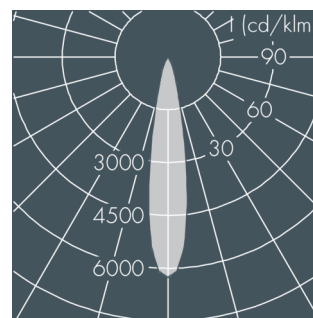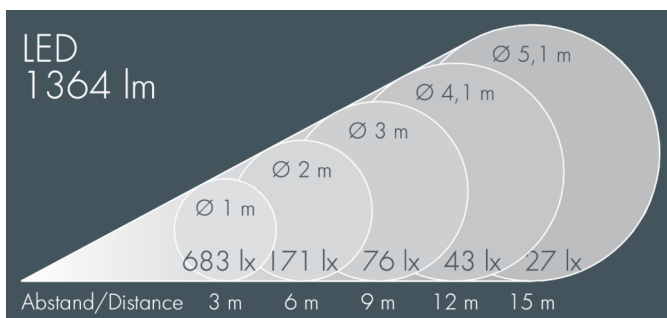



Part number	Colour	Description
1 29 0 320 950	silver grey	Cowl stainless steel, to reduce lateral glare, for retro fitting, not in combination with other accessories



Part number	Colour	Description
1 29 0 340 950	silver grey	Protection grill Stainless steel, to protect the glass from stone chip and vandalism, to be mounted on front of floodlight