



## Features

Specifically designed for Food-Processing Applications, IP69K, IP66. No exposed screws; no glass; smooth design. IP69K: protection against ingress of dust and high temperature, high pressure water 100bar (1450 psi), high temperature steam 80°C (176°F) – making products with this certification ideal for use in conditions where equipment must be carefully sanitized. (VERY IMPORTANT FOR FOOD PROCESSING PLANTS)

## Benefits:

- Meets all the requirement for Food prep and hygiene areas.

## Applications

Food Processing Plants, Warehouses, Factories, Pharmaceutical Manufacturing Facilities, Chemical Facilities, Beverage Processing, Poultry and Meat Processing, Pet-food Production, Grain and Sugar Production.

## Lifetime

50,000hr L70  
5 yr warranty




For technical details, see page 2

## RX KAI Highbay Product Range

|   |                                     |
|---|-------------------------------------|
| <b>WATTS</b>                                    | 150W                                |
| <b>LUMEN OUTPUT</b>                             | 19362lm                             |
| <b>EFFICACY</b>                                 | 129lm/W                             |
| <b>CCT &amp; RX</b>                             | 4000K                               |
| <b>CRI</b>                                      | >70Ra                               |
| <b>BEAM ANGLE</b>                               | 120° (90° and 50° lenses available) |
| <b>IP RATING</b>                                | IP66, IP69K                         |
| <b>IK RATING</b>                                | —                                   |
| <b>IC RATING</b>                                | —                                   |
| <b>IES FILES AVAILABLE?</b>                     | Yes                                 |
| <b>UGR</b>                                      | —                                   |
| <b>DIMMING / CONTROLS / DRIVER</b>              | Non Dimmable                        |
| <b>LIFETIME</b>                                 | 50,000 hr L70                       |
| <b>WARRANTY</b>                                 | 5yr                                 |
| <b>DIMENSIONS L,W,H</b>                         | 489mm dia x 200mm height            |
| <b>CUTOUT</b>                                   | —                                   |
| <b>WEIGHT</b>                                   | 7.2kg                               |
| <b>MATERIALS</b>                                | Aluminum Alloy                      |
| <b>BODY COLOUR</b>                              | Gloss Grey                          |
| <b>MOUNTING OPTIONS</b>                         | Hook Mount                          |
| <b>STANDARDS &amp; RATINGS EG CA</b>            | AS/NZS 60598.2.1                    |
| <b>CONNECTION EG FLEX &amp; PLUG / TERMINAL</b> | 1.5m flex and std plug              |

| ORDER CODE      | DESCRIPTION  |
|-----------------|--|
| REXHB06150W     | RX KAI High Bay 150W 4K Non-Dim Food Grade Gloss Grey IP65 |
| REXHB90ALIREF   | RX Disk High Bay Reflector Alu 90 Deg                      |
| REXHBSCHAIN1.5M | RX Disk High Bay Safety Chain Only 1.5m                    |
| REXSHB50LENS    | RX Disk High Bay 50 Degree Lens Accessory                  |
| REXSHB90LENS    | RX Disk High Bay 90 Degree Lens Accessory                  |

## Photometric diagrams

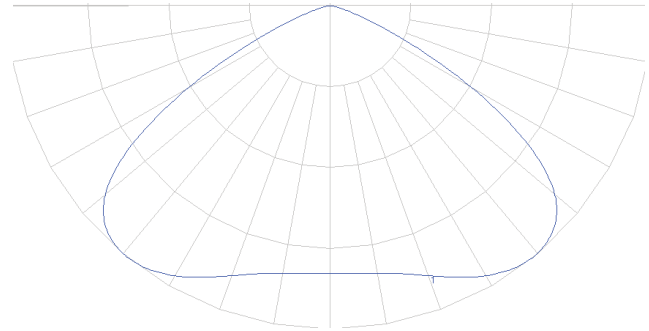

## Accessories



RX Disk Highbay 50 Degree Lens Accessory  
REXHB50LENS



RX Disk Highbay Reflector aluminum 90 Deg  
REXHB90ALIREF

## Dimensions

