


# Outdoor Facade Spot









	EAN	L x W x H	W	lm	lm/W	K	IP	IK
Outdoor Facade Spot 8W/3000K GY IP54	4058075074712	135x90x140	8	440	55	3000K	54	06
Outdoor Facade Spot 8W/3000K WT IP54	4058075074736	135x90x140	8	460	60	3000K	54	06






	EAN	∠	Temp (°C)	PF	R <sub>a</sub>	V <sub>AC</sub>	Hz	⚙️
Outdoor Facade Spot 8W/3000K GY IP54	4058075074712	110°	-20 ... 40	≥ 0.5	≥ 80	220-240V	50/60 Hz	0.6 kg
Outdoor Facade Spot 8W/3000K WT IP54	4058075074736	110°	-20 ... 40	≥ 0.5	≥ 80	220-240V	50/60 Hz	0.6 kg

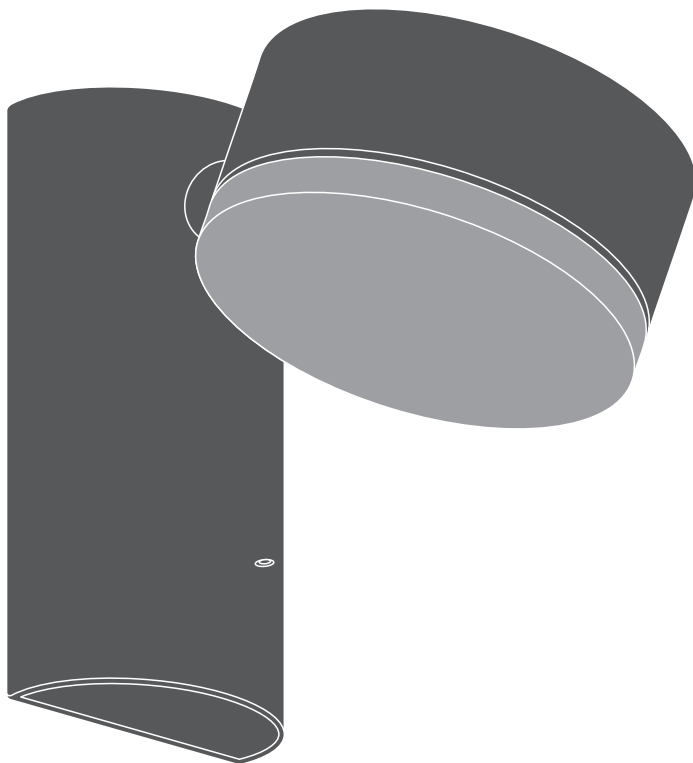

# Outdoor Facade Spot

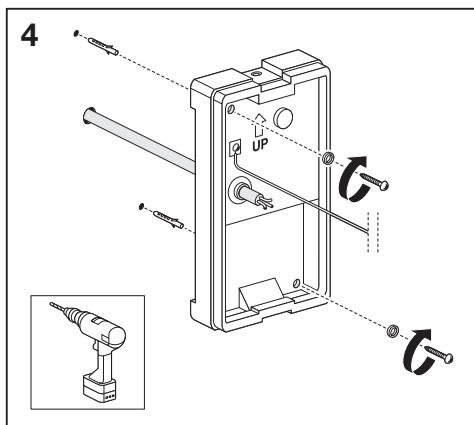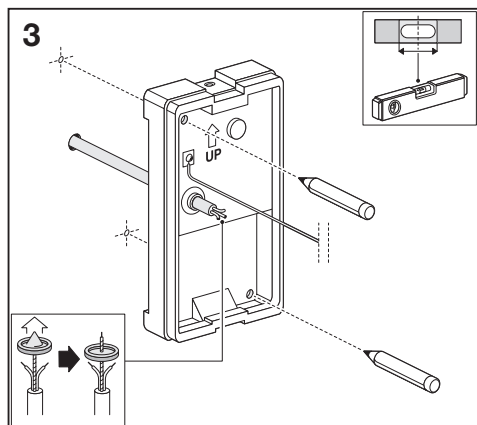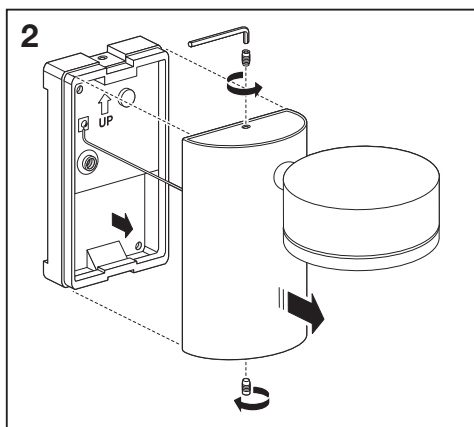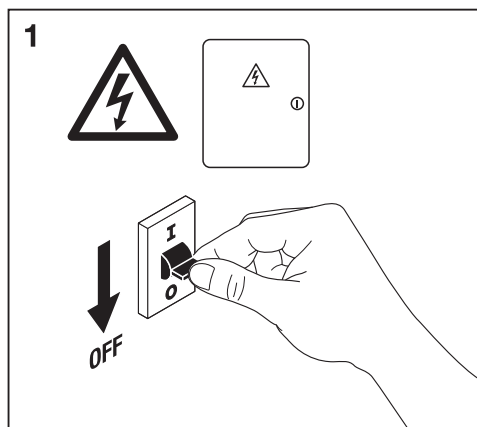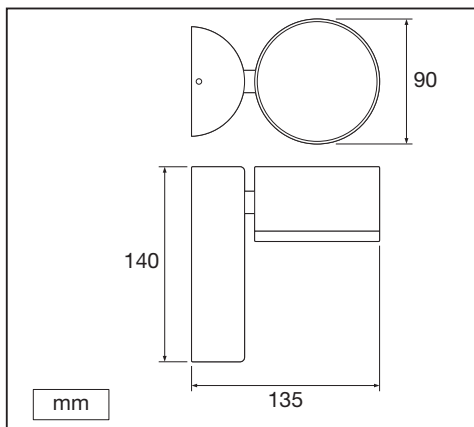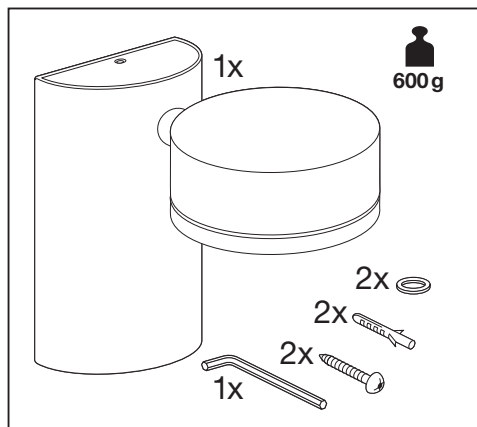

# Outdoor Facade Spot

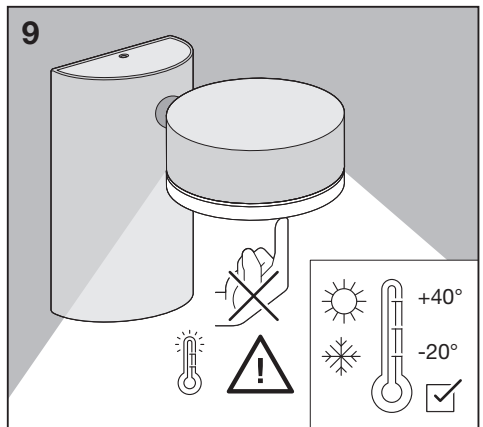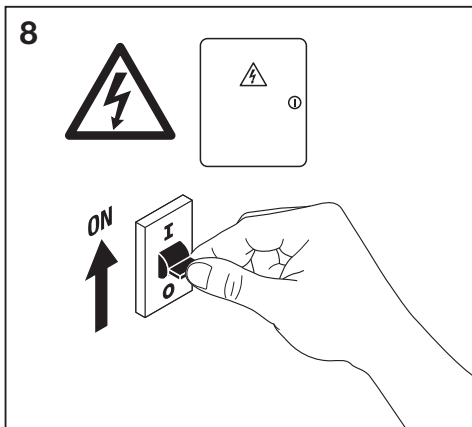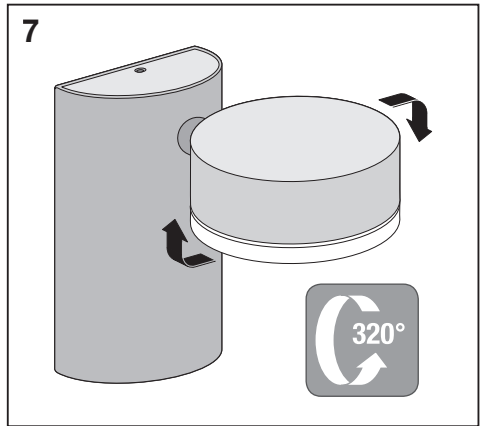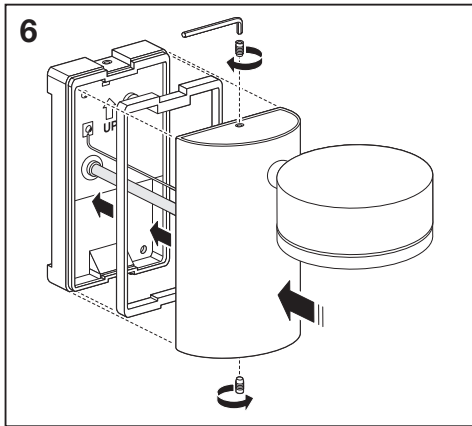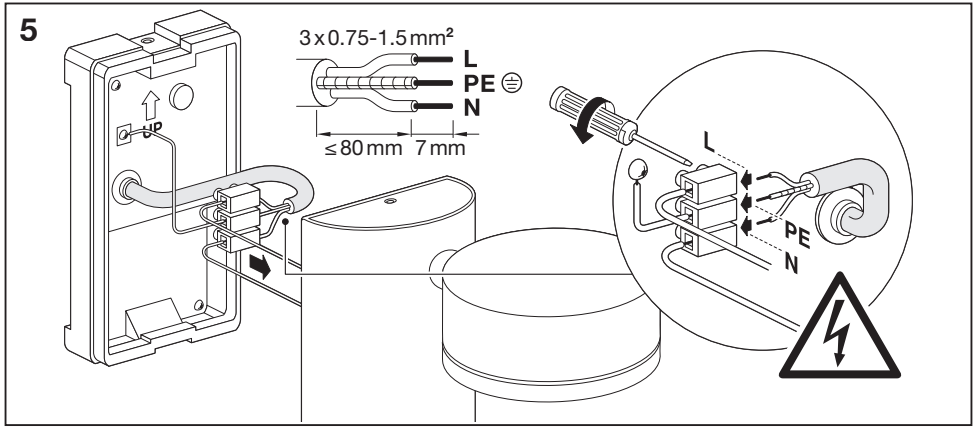

[www.luminaires.ledvance.com](http://www.luminaires.ledvance.com)



Downlight



Spot



Linear



Panel



Surface



DampProof  
IP65



HighBay



Floodlight



C10449057  
G11033055

15.12.17

LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg  
Germany  
[www.ledvance.com](http://www.ledvance.com)