

# PRODUCT DATASHEET

## SPOT MULTI 3 x 30W 4000K FL WT/BK

SPOT MULTI 3x30W | Recessed mounted spotlight, swivelable with three spot



---

### AREAS OF APPLICATION

- Accent- and general lighting for all kind of salesrooms
- Fashion shops, accessories shops
- Shops, boutiques
- Hotel rooms
- Cafés

---

### PRODUCT BENEFITS

- Low flicker light thanks to special electronic control gear
- High luminous efficacy
- Covering against other ceiling installations thanks to closed sheet steel housing
- Easy replacement of external driver thanks plug with bayonet lock
- Functional and minimalistic design
- 5 years guarantee

---

### PRODUCT FEATURES

- Large faceted reflector for high light output
- Beam angle: 38°
- Gimbal adjustment angle: +/- 25°



**TECHNICAL DATA**

Electrical data

Nominal wattage	3*30 W
Operating mode	External LED driver
Nominal voltage	220...240 V
Power factor $\lambda$	$\geq 0.90$
Mains frequency	50/60 Hz

Luminaire control gear data

ECG - Length	113 mm
ECG - Width	40 mm
Max. no. of lum. on circuit break. B16 A	10
Max. no. of lum. on circuit break. C10 A	8
Max. no. of lum. on circuit break. C16 A	13


Photometrical data

Color temperature	4000 K
Luminous flux	3*2700 lm
Luminous efficacy	90 lm/W
Standard deviation of color matching	$\leq 4$ sdc <sub>m</sub>
Light color (designation)	Cool White
Color rendering index Ra	>80

Light technical data

Beam angle	38.00 °
------------	---------

Dimensions & weight

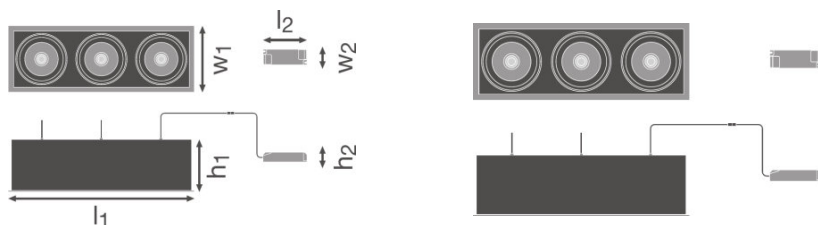

Length	487.0 mm
Width	173.0 mm

<b>Height</b>	135.0 mm
<b>Product weight</b>	3870.00 g

### Colors & materials

<b>Body material</b>	Aluminum
<b>Housing color</b>	White
<b>Product color</b>	White
<b>Cover material</b>	Polymethylmethacrylate (PMMA)

### Temperatures & operating conditions

<b>Ambient temperature range</b>	-10...40 °C
----------------------------------	-------------

### Lifespan

<b>Lifespan L70 at 25 °C</b>	50000 h
<b>Lifespan L80 at 25 °C</b>	45000 h
<b>Lifespan L90 at 25 °C</b>	30000 h

### Additional product data

<b>Mounting type</b>	Recessed
<b>Mounting location</b>	Ceiling



### Capabilities

<b>Adjustable</b>	Yes
<b>Dimmable</b>	No
<b>Type of connection</b>	Screw terminal, 2-Pole (L,N)
<b>LED module replaceable</b>	Not replaceable

### Certificates & standards

<b>Protection class IK (shock resistance)</b>	IK03
<b>Glow Wire Test according to IEC 695-2-1</b>	650 °C
<b>Photobiological safety group</b>	RG 1
<b>Protection class</b>	II
<b>Type of protection</b>	IP20
<b>Standards</b>	CE/CB/ENEC/TÜV SÜD/RoHS

Light Distribution

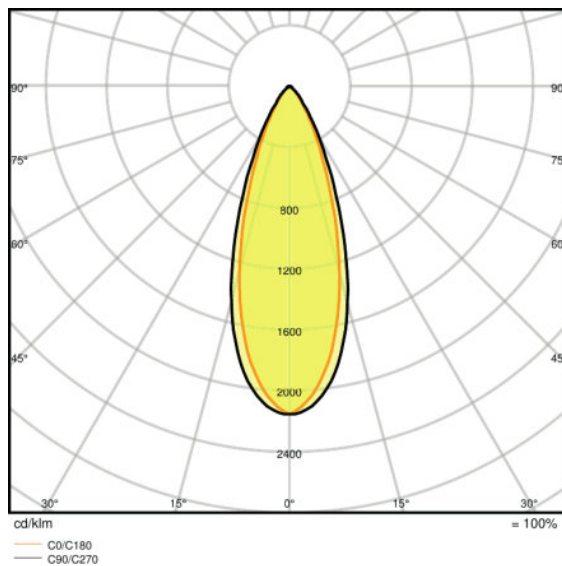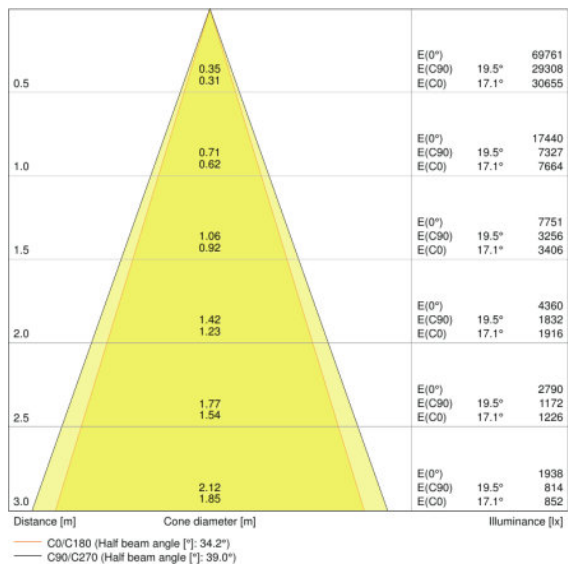

LDC typ cone

LDC typ polar

EQUIPMENT / ACCESSORIES

- Driver included

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075114029	SPOT MULTI 3 x 30W 4000K FL WT/BK	Shipping carton box 2	535 mm x 220 mm x 400 mm	47.08 dm <sup>3</sup>	16760.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see  
 ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.