



PRETTUS S SURFACED


POLISHED
LED



PHOTOMETRY



MOUNTING



POLISHED REFLECTOR AND TRANSPARENT COVER (PRT)




POLISHED REFLECTOR AND OPAL COVER (PRO)



TYPE	NET LUMEN OUTPUT (AT TA = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX CRI (Ra)	CORRELATED COLOUR TEMPERATURE CCT (K)	BEAM ANGLE	WEIGHT (kg)
PRETTUS S SURFACED PRT	1250	15	83	80+	3000	69°	3.7
PRETTUS S SURFACED PRT	1350	15	90	80+	4000	69°	3.7
PRETTUS S SURFACED PRT	1650	19	87	80+	3000	69°	3.7
PRETTUS S SURFACED PRT	1750	19	92	80+	4000	69°	3.7
PRETTUS S SURFACED PRO	1200	15	80	80+	3000	73°	3.7
PRETTUS S SURFACED PRO	1300	15	87	80+	4000	73°	3.7
PRETTUS S SURFACED PRO	1600	19	84	80+	3000	73°	3.7
PRETTUS S SURFACED PRO	1700	19	89	80+	4000	73°	3.7

Luminous flux tolerance +/- 10%

Prettus S Surfacled

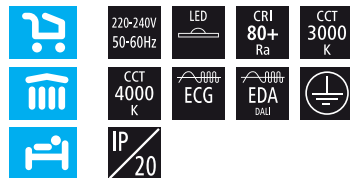

EN

Mounting
Ceiling surfaced (SFD)
Light source
LED
Optical system
Polished reflector + transparent cover (PRT)
Polished reflector + opal cover (PRO)
Wiring
Electronic control gear FIX/DALI (ECG/EDA)
Materials
Housing: extruded aluminium + sheet steel
Diffuser: microprismatic PMMA
Reflector: polished anodised aluminium
Cover: transparent/opal PMMA
Surface finish
Housing: white RAL 9003 (W03)
Service lifetime
50,000 hours/L80/B10 (ta 25°C) - 15 W
50,000 hours/L80/B20 (ta 25°C) - 19W
Ambient temperature
From -20 °C to +35 °C

DE

Montage
Deckenleuchte (SFD)
Lichtquelle
LED
Optisches System
Polierter Reflektor + durchsichtige Abdeckung (PRT)
Polierter Reflektor + opale Abdeckung (PRO)
Vorschaltgerät
Elektronisches Vorschaltgerät FIX/DALI (ECG/EDA)
Material
Körper: extrudiertes Aluminium + Stahlblech
Diffusor: mikroprismatisches PMMA
Reflektor: polierteseloxiertes Aluminium
Abdeckung: durchsichtiger/opaler PMMA
Oberflächenveredelung
Körper: weiss RAL 9003 (W03)
Lebensdauer
50,000 Stunden/L80/B10 (ta 25°C) - 15 W
50,000 Stunden/L80/B20 (ta 25°C) - 19W
Umgebungstemperatur
Von -20 °C bis +35 °C

FR

Montage
Plafonnier apparent (SFD)
Source lumineuse
LED
Système optique
Réflecteur poli + couvercle transparente (PRT)
Réflecteur poli + couvercle opale (PRO)
Équipement électrique
Ballast électronique FIX/DALI (ECG/EDA)
Matériels
Corps: aluminium extrudé + tôle d'acier
Diffuseur: PMMA microprismatique
Réflecteur: aluminium anodisé poli
Couvercle: PMMA transparente/opale
Finition de surface
Corps: blanc RAL 9003 (W03)
Durée de vie utile
50,000 heures/L80/B10 (ta 25°C) - 15 W
50,000 heures/L80/B20 (ta 25°C) - 19W
Température ambiante
De -20 °C à +35 °C

SK

Montáž
Svislené (SFD)
Svetelný zdroj
LED
Optický systém
Leštený reflektor + transparentný kryt (PRT)
Leštený reflektor + opálový kryt (PRO)
Elektrická výbava
Elektronický predradník FIX/DALI (ECG/EDA)
Material
Těleso: extrudovaný hliník + ocelový plech
Difúzor: mikroprizmatický PMMA
Reflektor: leštený anodizovaný hliník
Kryt: transparentný/opálový PMMA
Povrchová úprava
Těleso: biela RAL 9003 (W03)
Service life
50,000 hodin/L80/B10 (ta 25°C) - 15 W
50,000 hodin/L80/B20 (ta 25°C) - 19W
Teplota okolia
Od -20 °C do +35 °C

ES

Montaje
Sobrepuestas en el techo (SFD)
Fuente luminosa
LED
Sistema óptico
Reflector pulido + cubierta transparente (PRT)
Reflector pulido + cubierta opala (PRO)
Cableado
Equipo de control electrónico FIX/DALI (ECG/EDA)
Material
Cuerpo: aluminio extruido + lámina de acero
Difusor: microprismático PMMA
Reflector: aluminio anodizado pulido
Cubierta: PMMA transparente/opala
Tratamiento de la superficie
Cuerpo: blanco RAL 9003 (W03)
Vida útil
50,000 horas/L80/B10 (ta 25°C) - 15 W
50,000 horas/L80/B20 (ta 25°C) - 19W
Temperatura ambiente
Desde -20 °C a +35 °C

IT

Installazione
A plafone (SFD)
Sorgente luminosa
LED
Sistema ottico
Riflettore lucido + copertura trasparente (PRT)
Riflettore lucido + copertura opale (PRO)
Cablaggio
Ballast elettronico FIX/DALI (ECG/EDA)
Materiali
Corpo: estruso di alluminio + lamina d'acciaio
Diffusore: microprisma PMMA
Riflettore: alluminio anodizzato lucido
Copertura: PMMA trasparente/opale
Finitura
Corpo: bianco RAL 9003 (W03)
Durata di vita
50,000 ore/L80/B10 (ta 25°C) - 15 W
50,000 ore/L80/B20 (ta 25°C) - 19W
Temperatura d'ambiente
Da -20 °C a +35 °C

RU

Установка
Потолочная накладная (SFD)
Источник света
LED
Оптическая система
Шлифованный отражатель + чистая крышка (PRT)
Шлифованный отражатель + чистая крышка (PRO)
Электрическое оснащение
Электронный аппарат FIX/DALI (ECG/EDA)
Материал
Корпус: экструдированный алюминий + листовая сталь
Рассеиватель: микропризм. полиметилметакрилат
Отражатель: шлифованный анодированный алюминий
Крышка: чистая/матовая полиметилметакрилат
Отделка поверхности
Корпус: белый RAL 9003 (W03)
Срок службы
50,000 часов/L80/B10 (ta 25°C) - 15 W
50,000 часов/L80/B20 (ta 25°C) - 19W
Температура окружающей среды
От -20 °C до +35 °C

COMMERCIAL LED LUMINAIRES